

## HIGH FLOW STAINLESS STEEL AIR PUMP

Boltight's higher oil flow, stainless steel air driven hydraulic pump has been designed for use in a corrosive environment such as Subsea. The pump has a large 15 litre oil reservoir and can be used with all Boltight 1500 bar tooling. It is ideal for projects where speed of operation is essential.



### SPECIFICATION

- Mounted in a stainless steel transportable frame.
- 1600 litres air per minute (56 standard cubic feet per minute).
- Air pressure required 4-7 bar (60-100 psi).
- 31kg.
- Oil reservoir 15 litre ISO 10, 32, 46.
- Hydraulic Oil.
- Dual Scale 0-2000 bar (0-29000 psi) pressure gauge.
- 1500 bar working pressure.
- CEJN 116 hydraulic connection.



### FEATURES

- Offers air/hydraulic pump and high pressure oil outlet with a self-sealing quick connect coupling.
- Easy to use.
- All tools are pressure tested and issued with a test certificate.

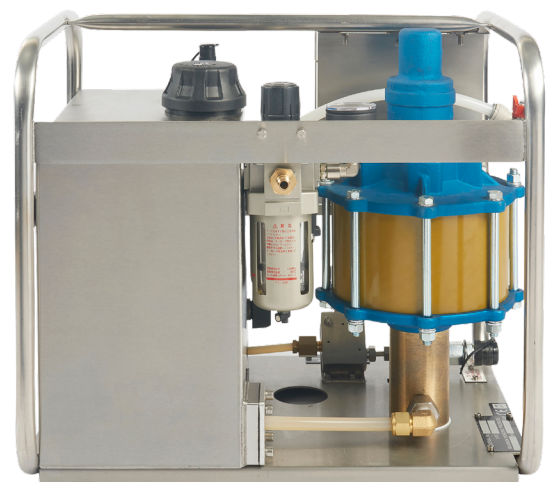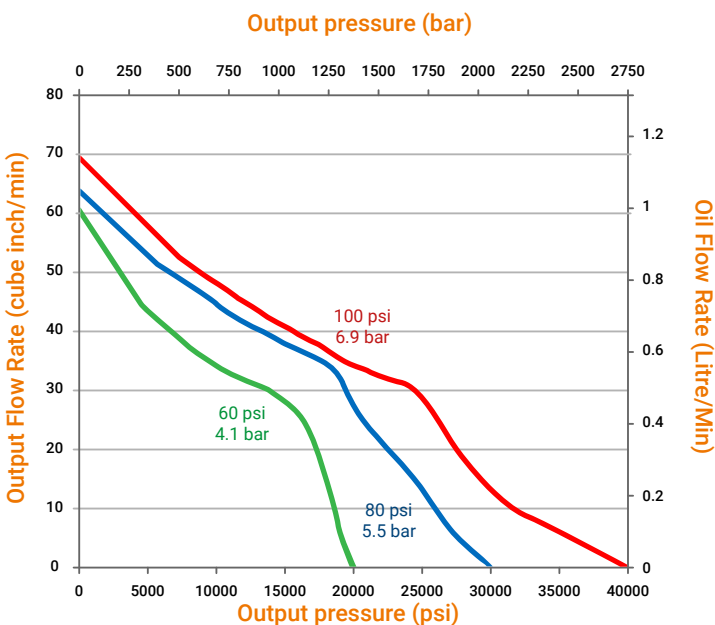

**Production Unit**  
Boltight Limited

Tel: +44 (0) 1922 669222  
Email: [sales.boltight.uk@nord-lock.com](mailto:sales.boltight.uk@nord-lock.com)  
[www.nord-lock.com](http://www.nord-lock.com)

**Sales Office**  
Nord-Lock Ltd

Tel: +44 (0) 1264 355557  
Email: [enquiries@nord-lock.co.uk](mailto:enquiries@nord-lock.co.uk)  
[www.nord-lock.com](http://www.nord-lock.com)

**NORD-LOCK**  
GROUP